



WE'VE GOT YOU  
**COVERED!**


# UE 4Site

## Online Monitoring Solutions for Critical Electric Transmission and Distribution Equipment


When electrical systems such as switch gear, transformers, insulators or disconnects and splices fail, the results can be catastrophic. The average cost of a critical electrical asset failure is greater than \$500K per event and with the aging equipment and less than 5% of critical electrical assets have continuous monitoring integrated, the time is now to efficiently monitor your critical electrical assets for the three common failure modes, arcing, tracking & corona.

Online continuous ultrasound inspection can be performed at all voltage levels (low, medium and high) and is used to detect:


- Corona
- Partial discharge or tracking
- Arcing

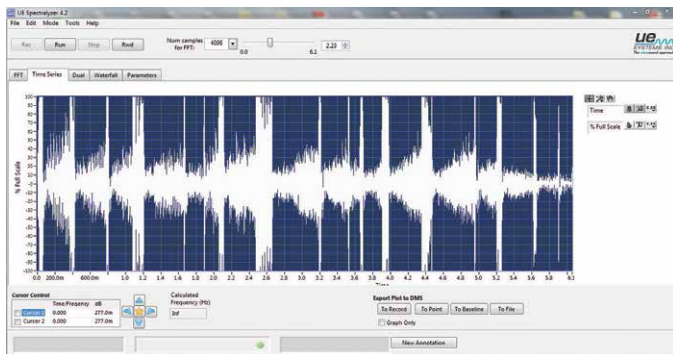

UE SPECTRALYZER™ - Spectral Analysis Software

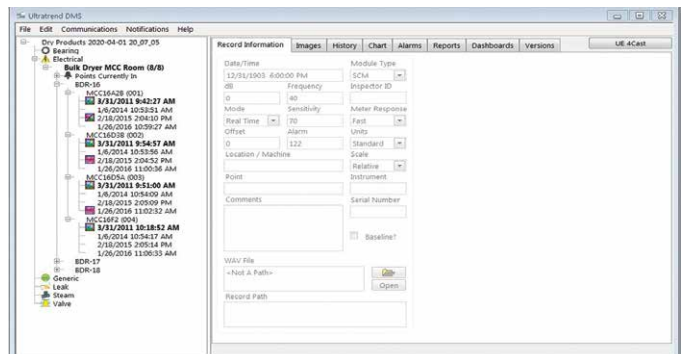

ULTRATREND DMS™ - Data Management Program

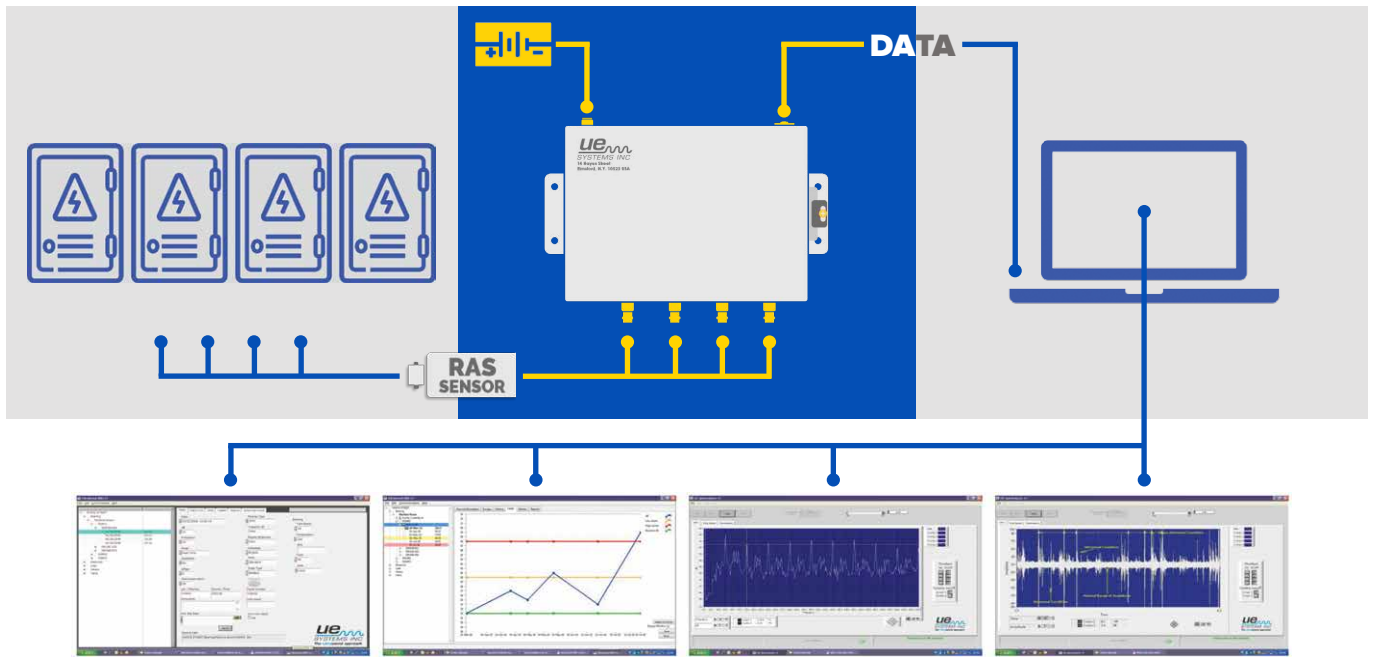

## Features

**Always Listening.** The 4Site is listening in real-time for the first sign of high frequency sounds produced by arcing, tracking & corona.

**Non-Invasive.** Utilizing the power of airborne ultrasound, there is no contact with the electrical components of the equipment being monitored, making installation safer and easier.

**Optimized Data.** The 4Site is designed to reduce data overload and alert by exception. While the 4Site is always listening, it will only transmit informative data if a threshold is crossed and eliminating the need to transmit healthy data.

**Scalability.** Each 4Site is designed to monitor up to 4 locations simultaneously in one unit.

## How Ultrasonic Electrical Inspection Works

Partial discharge/tracking, arcing and corona all produce ionization which disturbs the surrounding air molecules. The 4Site detects high frequency sounds produced by these emissions. The specific sound quality of each type of emission and the intensity of the signal is recorded. These sounds are analyzed through ultrasound spectrum analysis software for diagnosis & reporting.

Electrical equipment should be silent, although some equipment such as transformers may produce a constant 50 cycle hum, or some steady mechanical noises. These should not be confused with the erratic, sizzling frying, uneven and popping sound of an electrical discharge.

## Specifications

<b>Case</b>	Stainless Steel; Dimensions: 9"x6"x3" (22.8cm x 15.24cm x 7.62cm) Weight: 4.7 lbs. (2.1 kg)
<b>Power input</b>	24V, 1 amp (conditioned)
<b>Circuitry</b>	Solid State Analog and SMD Digital with temperature compensation and true RMS conversion
<b>Frequency Response</b>	20kHz-100 kHz Centered around 40 kHz
<b>Response time</b>	<10ms
<b>Operating Temperature</b>	32°F - 122°F / 0°C - 50°C
<b>Transducer Cable</b>	RAS piezoelectric, stainless steel housing BNC out to BNC in (length: 25' / 7.62 m, can be ordered up to 100 feet / 30,48 m)
<b>Transducer Mount</b>	thread: female10/32
<b>Software</b>	Ultratrend DMS 6.0 or higher



[www.uesystems.com](http://www.uesystems.com)

UE Systems Inc. • 14 Hayes St. • Elmsford, New York • USA 10523

T: +1 914 592 1220 • E: [info@uesystems.com](mailto:info@uesystems.com) • [www.uesystems.com](http://www.uesystems.com)